

Assessment of Climatic Water Balance for Ralegoan Taluka for Crop Planning

R. S. Rajput¹, V. K. Balsane², R.D. Bansod³

How to cite this article:

R. S. Rajput, V. K. Balsane, R.D.Bansoda/ Assessment of Climatic Water Balance for Ralegoan Taluka for Crop Planning/
Indian Journal of Waste Management. 2023;7(1):39–42.

Abstract

An agro climatic study was conducted at Tal. Ralegoan Dist. Yavatmal Vidharvha region of Maharashtra using database of 20 years (1998-2017) to assess the climatic water balance. The analysis of water balance components done on weekly basis. The average annual rainfall for Akola estimated as 796.44 mm. more than 30 mm rainfall 24 SMW to 38 SMW, more than 40 mm rainfall week during 28 SMW to 36 SMW and 50 mm rainfall occurrence in 29 SMW to 32 SMW. The highest PET was observed in 20 SMW weeks that is 54.11 mm and the lowest was observed in 1 SMW week i.e. 24.2 mm. The weekly total AET was recorded as 580.88 mm for period 1998 to 2017. The highest ATE was 28.4 mm during 30 SMW weeks and lowest was 0.05 mm during 21 SMW. The annual deficit determined as 1284.29 mm. SMI > 0.5 was found to occur during the period from 27 SMW to 40 SMW. The annual effective rainfall was found 577.42 mm during period of 1998 to 2017. The highest effective period of rainfall found in June to July month and weak at 22 to 42 SMW.

Under average rainfall condition, the period during which AET was greater than 25% of PET prevailed from 24 to 46 SMW, whereas the period during which AET more than 50% of PET existed during the period from 24 to 42 SMW

Keywords: Rainfall; Actual Evapotranspiration; Potential Evapotranspiration; Water surplus; Water deficit.

INTRODUCTION

Water is very essential resource for mankind. The availability of pure water is less in the region and one of the factors dependent is rainfall which is unevenly distributed. In semi-arid region rainfall is less and unpredictable; hence demands of water for drinking and irrigation becomes critical. For

planning and managing of available resources at watershed level, water regime of area need to be studied by using water balance approach.

In semi-arid regions, water resources are limited and thereby the available ground water for irrigation and other water uses are severely constrained. Water demand for agriculture arid to humid landscape. However, there is always need for optimum use and planning of water resources. At global level climate changes day by day. It may influence the air temperature, rainfall patterns impacting the availability of water, along with the danger of increasing occurrences of droughts and production of crop.

The Central Maharashtra zone belongs to semi-arid climatic regions, it characterized by limited water resources due to expanding urban, industrial and agricultural water demands. In semi-arid regions,

Author's Affiliation: ¹Assistant Professor, Dept of Agril.Engineering, College of Agriculture, Dondaicha, ²Assistant Professor of SWCE, Govt. College of Agriculture, Nandurbar, ³Professor, Dept of Agril. Engineering, College of Agriculture, Pune-413722, Mahatma Phule Krishi Vidyapeeth, Rahuri, India.

Corresponding Author: R.D. Bansod, Professor, Department of Agrilcuture Engineering, College of Agriculture, Pune 413722, Maharashtra, India.

E-mail: rtujapur1808@gmail.com

Received on: 16.03.2023

Accepted on: 04.04.2023

the actual evapotranspiration (AET) represents a key role of the hydrological cycle. AET may account for more than 90% of the precipitation (Pilgrim et al., 1988; Huxman et al., 2005). The state experienced massive agricultural losses due to water scarcity in recent years.

The water balance studies provide an indirect evaluation of an unknown water balance component from the known components. By considering the importance of water balance, the research work involving evaluation of water balance for Tal. Ralegoan Dist. Yavatmal. Hence, an attempt has been made to assess the climatic water balance for evaluation of effective crop management strategy with the objective to compute the water balance components.

MATERIALS AND METHODS

Study Area

The study was conducted at Taluka Ralegoan Dist. Yavatmal Vidharbha region of Maharashtra. The district lies between 19°26' and 20°42' North latitude and 77°18' and 79°9' East longitude.

Data Collection

The daily rainfall data for sixteen talukas of Yavatmal district was collected from www.mahaagri.gov.in. For Ralegaon taluka daily rainfall data for the year 1999 was unavailable. Maximum and minimum temperature data for Yavatmal taluka was collected from All India Co-ordinated Research Projects on Agrometeorology, Dr. PDKV Akola for period of 20 years i.e. 1998 to 2017. It is used for the calculation of minimum and maximum temperature by using the phenomenon of environmental lapse rate.

METHODOLOGY

Year wise weekly water balance computation was carried out by using weekly total rainfall, normal total PET and AWHC following the procedure given by (1985) model (Article 3.3.3) by using 'Weather cock' software. Output components of water balance method were soil moisture storage (SMS), actual evapotranspiration (AET) and water surplus, water deficit, soil moisture index (SMI). The derived parameters estimated from the water balance parameters were index of moisture adequacy index (Ima), which is the ratio between AET and PET and soil moisture index (SMI) which is the ratio between SMS and AWHC. The water balance method considered that when rainfall was greater than PET, AET was taken as equal to PET

and when rainfall was below the PET; the AET was calculated as the sum of rainfall and change in soil moisture storage between two successive weeks. The surplus water was determined in the present study. The effective rainfall was calculated by subtracting water surplus from rainfall (Chang, 1968).

RESULTS AND DISCUSSION

Weekly water balance analysis

The results on average rainfall, PET, AET, water surplus, water deficit and soil moisture index (SMI) for period of 1998-2017, presented in Fig. 1 revealed that highest average rainfall was observed in 30 SMW (87.37 mm) whereas lowest was observed in 15 SMW (0.05mm). Fig. 1 revealed that average rainfall was 10 mm during 23 SMW to 42 SMW, more than 30 mm rainfall 24 SMW to 38 SMW, more than 40 mm rainfall week during 28 SMW to 36 SMW and 50 mm rainfall occurrence in 29 SMW to 32 SMW. Also rainfall more than 80 mm was available during 30 SMW. The highest weekly rainfall was 87.37 mm in 30 SMW followed by 67.28 in 31 SMW. Whereas, the lowest rainfall was in 15 SMW and was 0.05mm. The week where rainfall 40 mm is 28 SMW to 36 SMW for consecutive period, could be identified as the growing period of different *Kharif* and *rabi* crop in Akola.

The PET was greater than 40 mm during 12 SMW to 25 SMW, whereas the PET was greater than 50 mm from 16 SMW to 22 SMW. PET was below 30 mm found in 44 SMW to 6 SMW. PET was not less than 20 mm during any week. The highest PET was observed in 20 SMW weeks that is 54.11 mm and the lowest was observed in 1 SMW week i.e. 24.2 mm. The weekly total AET was recorded as 580.88 mm for period 1998 to 2017. The highest ATE was 28.4 mm during 30 SMW weeks and lowest was 0.05 mm during 21 SMW.

Water surplus which includes runoff and deep drainage was found to prevail from 26 SMW to 38 SMW it shows that PET value goes on decreasing throughout the corresponding SMW. This information provides scope for identification of suitable crop varieties to match with the period of water surplus. The highest water surplus was recorded as 46.93 mm during 30 SMW. The total annual surplus was computed as 284.62 mm during 26 SMW to 38 SMW as against the total water deficit 118.81 mm during the corresponding period. However annual deficit determined as 1284.29 mm.

The 50% of AWHC value prevailed during the

period from 27 SMW to 40 SMW, it indicating that under average rainfall condition, crops growing his period during would be able to produce at potential level similar variation was also observed in soil moisture index, where $SMI > 0.5$ was found to

occur during the period from 27 SMW to 40 SMW. The annual effective rainfall was found 577.42mm during period of 1998 to 2017. The highest effective period of rainfall found in June to July month and weak at 22 to 42 SMW.

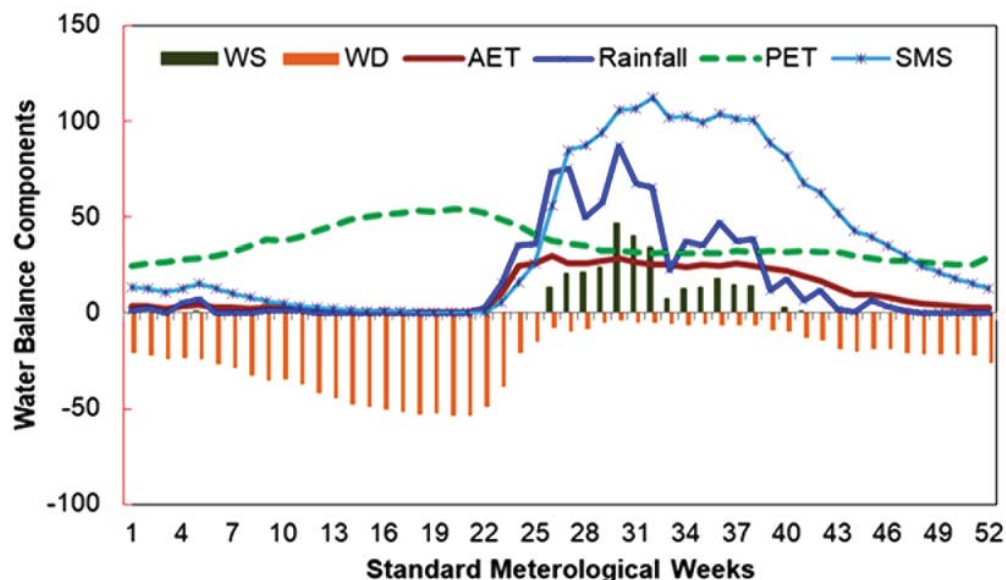


Fig. 1 Average weekly water balance parameter at Ralegoan

Water Availability Period

Under average rainfall condition, the period during which AET was greater than 25% of PET prevailed from 24 to 46 SMW, whereas the period during

which AET more than 50% of PET existed during the period from 24 to 42 SMW (Fig. 2). Thus, it was evident that under average rainfall condition, LGP would be as high as 168 days extending from 24 to 46 SMW.

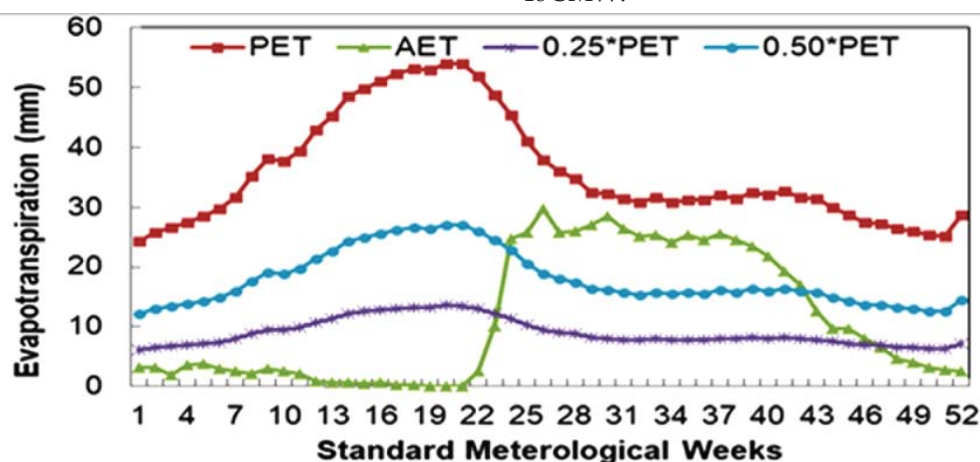


Fig. 2: Water availability period at Ralegoan

CONCLUSION

The weeks where rainfall 40 mm is 28 SMW to 36 SMW for consecutive period, could be identified as the growing period of different *Kharif* and *rabi* crop in Ralegoan. Water surplus which includes runoff and deep drainage was found to prevail from 26

SMW to 38 SMW it shows that PET value goes on decreasing throughout the corresponding SMW. This information provides scope for identification of suitable crop varieties to match with the period of water surplus. The 50% of AWHC value prevailed during the period from 24 SMW to 42 SMW, it indicating that under average rainfall condition,

crops growing his period during would be able to produce at potential level. The total surplus was 284.61 mm. The results indicate that less number of the years had annual surplus water was less than 200 mm. This surplus water shall be stored in water harvesting structures as provision for protective irrigation.

REFERENCES

1. Anonymous, (2013) A report on resource management research 2013-14. Agro Ecology and Environment Center, Dr. PDKV, Akola.
2. Anonymous, (2014) A report on resource management research 2014-15. Agro Ecology and Environment Center, Dr. PDKV, Akola.
3. Anonymous, (2015) A report on resource management research 2015-16. Agro Ecology and Environment Center, Dr. PDKV, Akola.
4. Chang, J.H. 1968. Climate and Agriculture: An Ecological Survey. Aldine Publishing Company, 320 West Adams Street, Chicago, Illinois 60606, U.S.A., 296 p.
5. Huxman TE, Wilcox BP, Breshears DD, Scott RL, Snyder KA, Small EE, Hultine K, Pockman WT, Jackson RB (2005). Ecohydrological implications of woody plant encroachment. Ecology: 86:308-319.
6. Pilgrim DH, Chapman TG and Doran DG (1988) Problems of rainfall-runoff modelling in arid and semiarid regions. Hydrological Sciences Journal, 33:4, 379-400, DOI: 10.1080/02626668809491261.
7. Thornthwaite CW and Mather JR (1955). The water balance. Publications in Climatology, Dreseal Inst. of Technology, New Jersey, 8 (1):104.
8. E reference: https://en.wikipedia.org/wiki/Akola#Geography_and_climate.